

## DL400 SE Slimline timeflow shower panel

### Features and Benefits

- Prefabricated shower
- Adjustable anti-scale shower head including flow regulator
- Ergonomic push button
- Timed flow control set to 30 seconds as recommended in BS EN 816
- Easy and quick to install
- Low profile



### Description

A self contained one piece timeflow shower panel, with an anti-scale shower head, incorporating a 10lpm flow regulator, comes complete with all necessary wall mounting fittings. The panel comes in a grey aluminium finish and has a specially designed ergonomic push button for easy operation. The panel's low profile and quick installation make it ideal for group showering installations.

# SHOWER PANEL Specification Sheet



The Safety Valve Specialist

## Specifications

Connection for top inlet	15mm
Connection for back inlet	½"MBSP
Pre-set flowrate	10 lpm at 1bar
Minimum pressure	0.8bar
Maximum working pressure	5bar
Maximum temperature	80°C
Timed flow duration	30 seconds

## Approvals

WRAS approval application pending


## Standards

BS EN 816


## Product Codes

PANL 400 000	DL400 SE Exposed panel top inlet	15mm
PANL 400 020	DL400 SE Exposed panel back inlet	½"MBSP

## Typical Installation

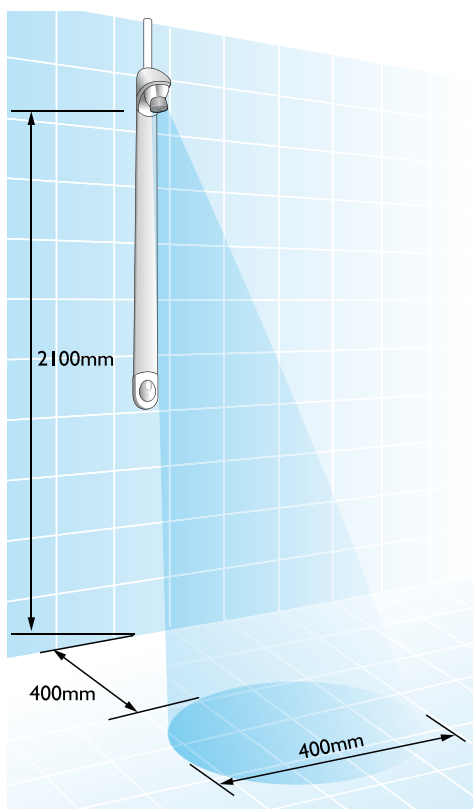

## Dimensions

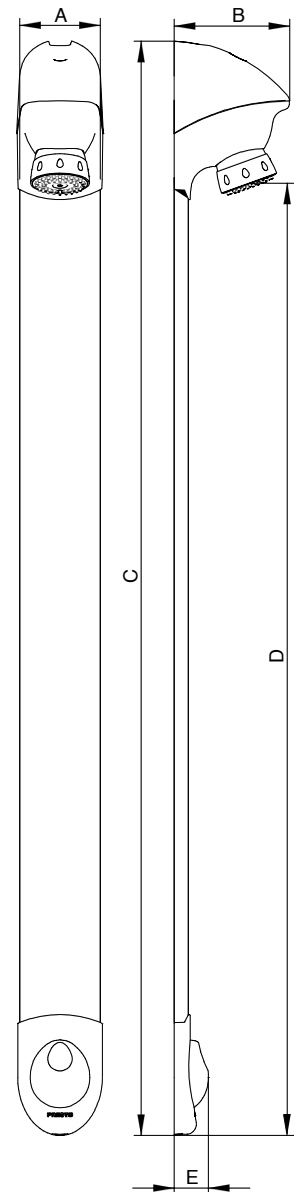

Model	A	B	C	D	E
DL400SE	80	115	1090	2100	34

All dimensions shown in mm unless otherwise stated

**Reliance Water Controls Ltd**  
A Reliance Worldwide Company

Worcester Road, Evesham, Worcestershire, WR11 4RA, UK. UK – Freephone: 0800 389 5931  
Freefax: 0800 389 5932 Outside UK – Tel: +44 (0)1386 712400 Fax: +44 (0)1386 712401 Email: sales@rwc.co.uk

[www.rwc.co.uk](http://www.rwc.co.uk)