



## 506 TIMEFLOW BIB TAPS

PUSH200020 506 bib tap

### OVERVIEW

Push activated timed flow bib tap for commercial washrooms. Internal workings include wear-resistant synthetic ruby for reliable and consistent operation, 4 position internal flow regulator and fully replaceable cartridge.



WATER CONTROLS FOR A MODERN WORLD

**RELIANCE**

TEMPERATURE  
CONTROL

FLOW  
CONTROL

HEATING SYSTEM  
COMPONENTS

WASHROOM  
SYSTEMS

HEATING & COOLING  
DISTRIBUTION SYSTEMS

PLUMBING  
SYSTEMS

# 506 TIMEFLOW BIB TAPS

## FEATURES AND BENEFITS


- Supplied with an easily serviced one-piece cartridge
- Patented, technologically advanced internal mechanism provides a long working life and consistent run times
- One tap for either hot or cold can simplify stockholding and spares
- 15 second timed flow rate as per BS EN 816
- Saves up to 60% of water consumption when compared to conventional taps
- Unique to Presto timeflow controls: an internal synthetic ruby (shown below both in place and alongside internal component, and with biro tip for scale) provides supremely hardwearing resistance. Ensures flow remains reliable and consistent to prolong product lifetime, even after tens of thousands of activations

## SPECIFICATIONS

Maximum working pressure:	6.0 bar
Minimum working pressure:	0.2 bar
Maximum static pressure:	10.0 bar
Timed flow rate:	15 secs (+/- 5)
Maximum temperature:	80°C
Minimum temperature:	5°C
Connection:	1/2" MBSP

## STANDARDS AND APPROVALS

- Conforms to BSEN 816
- WRAS Approved
- WTL Listed

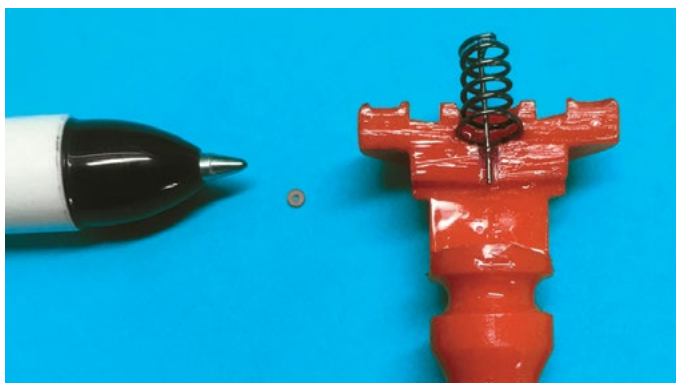

## DIMENSIONS

All dimensions in mm unless otherwise stated.

