



606 TIMEFLOW BASIN TAP

PUSH200000 606 basin tap

OVERVIEW

Push activated timed flow basin tap for commercial washrooms. Internal workings include wear-resistant synthetic ruby for reliable and consistent operation, 4 position internal flow regulator and fully replaceable cartridge.



WATER CONTROLS FOR A MODERN WORLD

RELIANCE

TEMPERATURE
CONTROL

FLOW
CONTROL

HEATING SYSTEM
COMPONENTS

WASHROOM
SYSTEMS

HEATING & COOLING
DISTRIBUTION SYSTEMS

PLUMBING
SYSTEMS

606 TIMEFLOW BASIN TAPS

FEATURES AND BENEFITS


- Supplied with an easily serviced one-piece cartridge
- Patented, technologically advanced internal mechanism provides a long working life and consistent run times
- One tap for both hot and cold can simplify stockholding and spares
- 15 second timed flow rate as per BS EN 816
- Saves up to 60% of water consumption when compared to conventional taps
- Unique to Presto timeflow controls: an internal synthetic ruby (shown below both in place and alongside internal component, and with biro tip for scale) provides supremely hardwearing resistance. Ensures flow remains reliable and consistent to prolong product lifetime, even after tens of thousands of activations

SPECIFICATIONS

Maximum working pressure:	6.0 bar
Minimum working pressure:	0.2 bar
Maximum static pressure:	10.0 bar
Timed flow rate:	15 secs (+/- 5)
Maximum temperature:	80°C
Minimum temperature:	5°C
Connection:	1/2" MBSP

STANDARDS AND APPROVALS

- Conforms to BSEN 816
- WRAS Approved
- WTL Listed

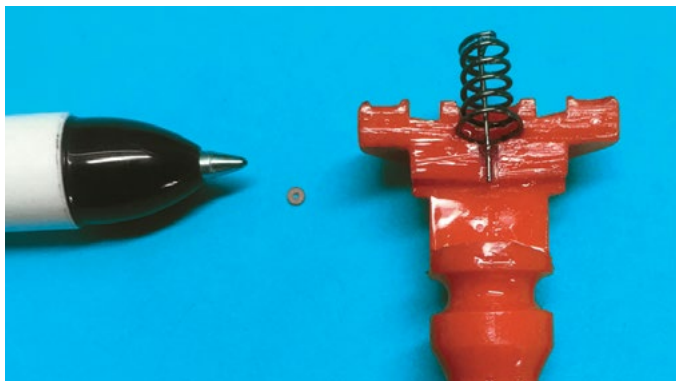

DIMENSIONS

All dimensions in mm unless otherwise stated.

