



POTABLE WATER SHOCK ARRESTORS

XVES050000	0.16Ltr
XVES050005	0.5Ltr
XVES050006	1.0Ltr
XVES050007	2.0Ltr
SBXVES050000	0.16Ltr with chrome-plated push-fit connection
SBXVES030050	0.16Ltr with chrome-plated push-fit tee

OVERVIEW

Potable water shock arrestors are designed to prevent water hammer. Models available with SharkBite® push-fit connections.



WATER CONTROLS FOR A MODERN WORLD

RELIANCE

TEMPERATURE CONTROL

FLOW CONTROL

HEATING SYSTEM COMPONENTS

WASHROOM SYSTEMS

HEATING & COOLING DISTRIBUTION SYSTEMS

PLUMBING SYSTEMS

POTABLE WATER SHOCK ARRESTORS

FEATURES AND BENEFITS

- Compact mini vessels can be fitted at the point of use to stop water hammer
- Stainless steel shell and flange prevent corrosion
- Complete with pre-charge valve for topping up air pressure

SPECIFICATIONS

Maximum temperature:	99°C
Minimum temperature:	-10°C
Maximum working pressure:	15.0 bar
Pre-set pressure:	5.0 bar

MATERIALS


Shell:	Stainless steel
Membrane:	EPDM
Clenched flange:	Stainless steel

APPROVALS AND STANDARDS

- WRAS Approved

DIMENSIONS

All dimensions in mm unless otherwise stated.

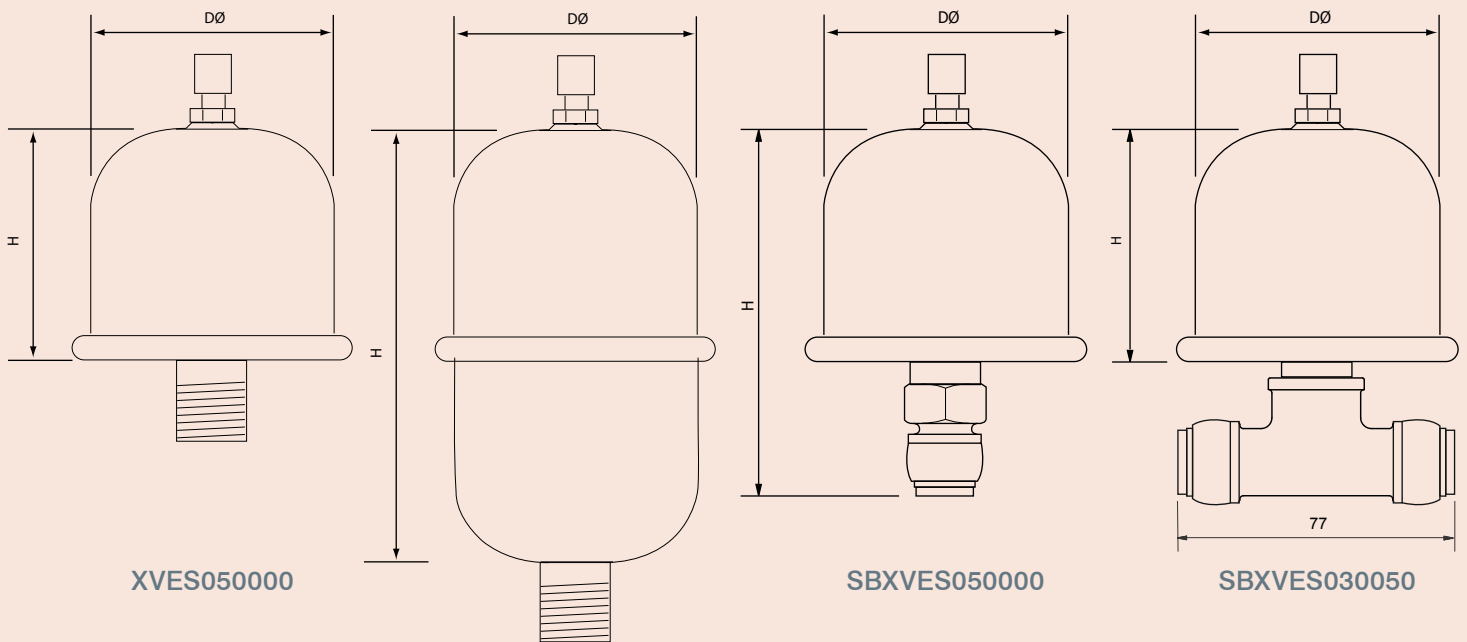

Code	Capacity	Pre-Set Pressure	Height (H)	Diameter (D)	Water Connection
XVES050000	0.16L	5.0 bar	105	65	½" MBSP
XVES050005	0.5L	5.0 bar	160	95	½" MBSP
XVES050006	1L	5.0 bar	195	114	½" MBSP
XVES050007	2L	5.0 bar	220	130	½" MBSP
SBXVES050000	0.16L	5.0 bar	105	65	15mm push-fit
SBXVES030050	0.16L	5.0 bar	105	65	15mm push-fit