



DL400 SE SLIMLINE TIMEFLOW SHOWER PANEL

- PANL400000 Exposed panel top inlet grey
- PANL400020 Exposed panel back inlet grey

OVERVIEW

A self contained one piece timeflow shower panel, with an anti-scale shower head, incorporating an 8lpm flow regulator, complete with all necessary wall mounting fittings. The panel comes in a grey aluminium finish and has a specially designed ergonomic push button for easy operation. The panel's low profile and quick installation make it ideal for group showering installations.



WATER CONTROLS FOR A MODERN WORLD

RELIANCE

TEMPERATURE
CONTROL

FLOW
CONTROL

HEATING SYSTEM
COMPONENTS

WASHROOM
SYSTEMS

HEATING & COOLING
DISTRIBUTION SYSTEMS

PLUMBING
SYSTEMS

DL400 SE SLIMLINE TIMEFLOW SHOWER PANEL

FEATURES AND BENEFITS

- Low profile shower, fits tight to wall and does not encroach into showering area
- Easy touch control to activate the flow of water, ideal for children and the elderly
- Patented, technologically advanced internal mechanism provides a long working life and consistent run times
- Scale resistant, easy to clean, moveable or lockable shower head with integral flow regulator
- Top or back entry variants available, both supplied with isolating valves for ease of installation and maintenance
- Saves up to 60% of water consumption when compared to conventional showers
- Supplied complete with Biocare foam gasket to stop water ingress behind the panel

SPECIFICATIONS

Connection for top inlet:	15mm
Connection for back inlet:	1/2" MBSP
Pre-set flowrate:	8 lpm at 1bar
Minimum pressure:	0.8 bar
Maximum working pressure:	5.0 bar
Maximum temperature:	80°C
Timed flow duration:	30 seconds

STANDARDS AND APPROVALS


- Conforms to BSEN 816
- WTL
- WRAS Approved

SPARES

SKIT400000:	Cartridge
ZNOB400020:	Spare push button
ZFIX400020:	Control knob trigger

DIMENSIONS

All dimensions in mm unless otherwise stated.

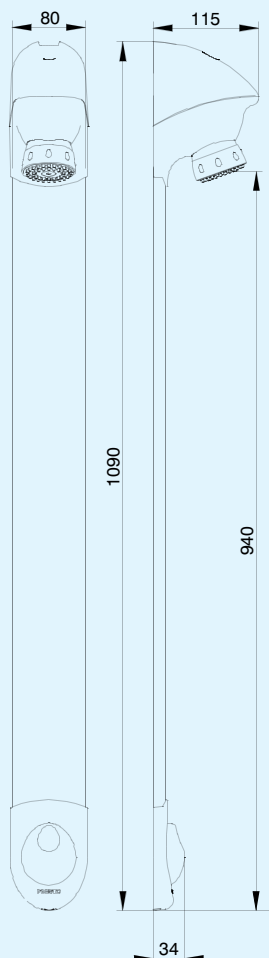

TYPICAL INSTALLATION

