



HEATGUARD® TEMPERING VALVE

HEAT110505 22mm Heatguard tempering valve

OVERVIEW

The Heatguard tempering valve takes a hot water supply directly from a hot water cylinder along with a cold water supply and mixes them together to deliver tempered water at a stable circulating temperature. The valve is pre-set and locked to 55°C which is the minimum recommended circulating temperature. Complete with 22mm direct compression connections, for ease of installation.



WATER CONTROLS FOR A MODERN WORLD

RELIANCE

TEMPERATURE
CONTROL

FLOW
CONTROL

HEATING SYSTEM
COMPONENTS

WASHROOM
SYSTEMS

HEATING & COOLING
DISTRIBUTION SYSTEMS

PLUMBING
SYSTEMS

HEATGUARD[®] TEMPERING VALVE

FEATURES AND BENEFITS

- Pre-set and locked at 55°C
- Complete with 22mm direct compression connections
- Tamperproof cap
- Provides stable mixed water temperature
- Easy and quick to install


SPECIFICATIONS

Maximum water temperature:	99°C
Pre-set temperature:	55°C
Temperature adjustment range:	Min 35°C Max 70°C
Maximum pressure:	16.0 bar
Minimum working pressure:	0.2 bar
Temperature differential:	15°C
Minimum flow rate:	4 L/min


APPROVALS

- WRAS Approved

FLOW RATES

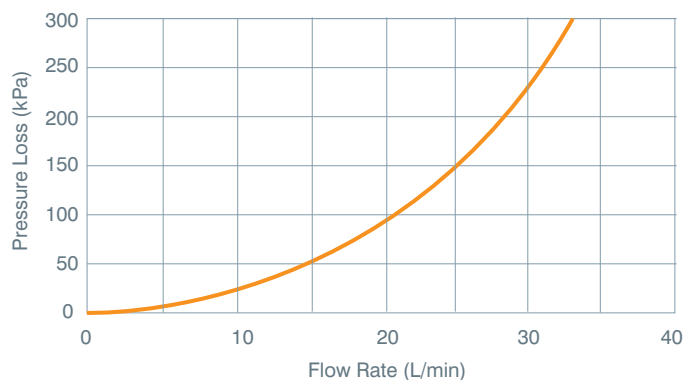

TYPICAL INSTALLATION

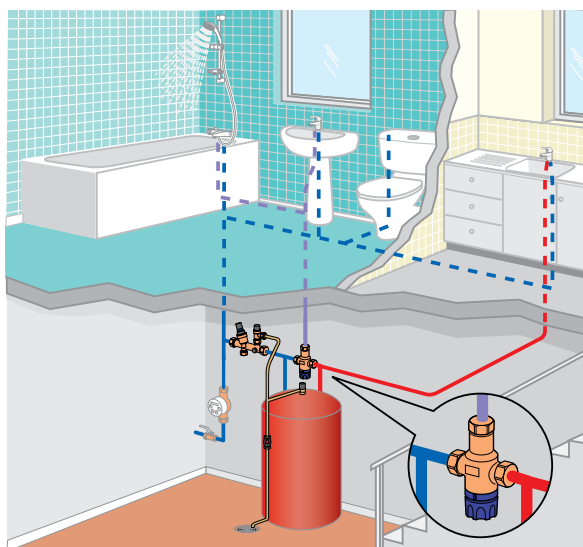

DIMENSIONS

All dimensions in mm unless otherwise stated.

