



## RELIANCE TIMEFLOW SHOWERS

- SELF300200 Exposed timeflow shower
- SELF300205 Concealed timeflow shower

### OVERVIEW

A timed flow shower control, available for exposed or concealed supplies. Saves on water usage in comparison with conventional showers by automatically shutting off the flow of water after 15 to 20 seconds.



WATER CONTROLS FOR A MODERN WORLD

**RELIANCE**

TEMPERATURE CONTROL

FLOW CONTROL

HEATING SYSTEM COMPONENTS

WASHROOM SYSTEMS

HEATING & COOLING DISTRIBUTION SYSTEMS

PLUMBING SYSTEMS

# RELIANCE TIMEFLOW SHOWERS

## FEATURES AND BENEFITS


- Non-concussive, self-closing shower control
- Saves on water consumption and prevents waste
- Robust self-closing mechanism helps to discourage vandalism
- Ideal for public facilities
- 15 to 20 second flow time

## SPECIFICATIONS


Maximum operating pressure:	6 bar
Minimum operating pressure:	0.5 bar
Maximum inlet temperature:	65°C
Timed flow @ 0.5 bar:	15-20 +/- 5 seconds
Connection:	15mm

## DIMENSIONS

All dimensions in mm unless otherwise stated.

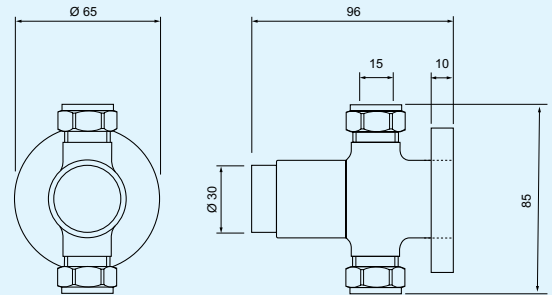

SELF300200

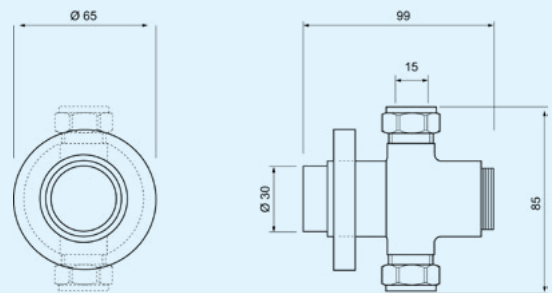

SELF300205